



TECTUL


POLEA SIN BASE 2-1/2" PERFIL GUAYA 3/8" CON RODAMIENTO

MATERIALES

CARACTERÍSTICAS FÍSICAS



CARACTERÍSTICAS DIMENSIONALES

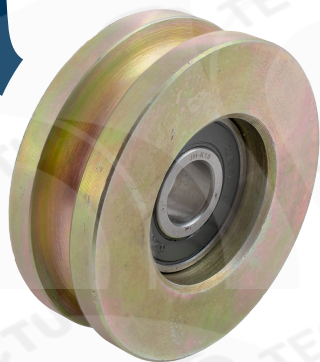

CARACTERÍSTICAS

Diseñada para aumentar la fuerza de elevación con una rueda de seguimiento y un cable, cuerda o cadena.

MATERIALES

Acero al carbono laminado en frío según normas AISI/SAE 1045, DIN C22 o UNS G 10200.


APLICACIONES

Diseñadas para el sector agrícola. Ideales para el secado de café, cacao, maíz y para el transporte e izado de carga.


DATOS TÉCNICOS

COMPONENTES	CARGA ESTÁTICA
Disco en Acero SAE/1045	290 kg
Tuerca De Seguridad M12	
Tornillo M12 X 40mm Galvanizado	
Buje 3/8" x 7.8 mm	
Rodamiento Rígido de Bola 6201	

* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.

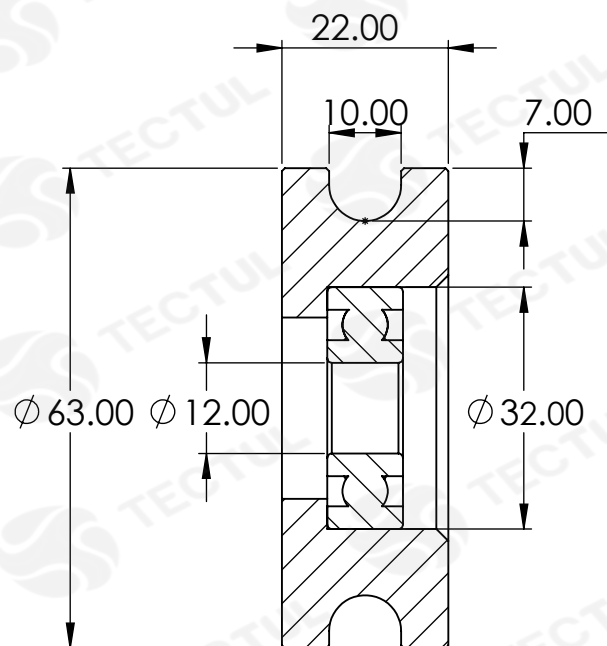

* Vista de sección transversal de tipo informativa. No representa una versión específica del accesorio o elemento
Las tolerancias pueden variar $\pm 2\text{mm}$

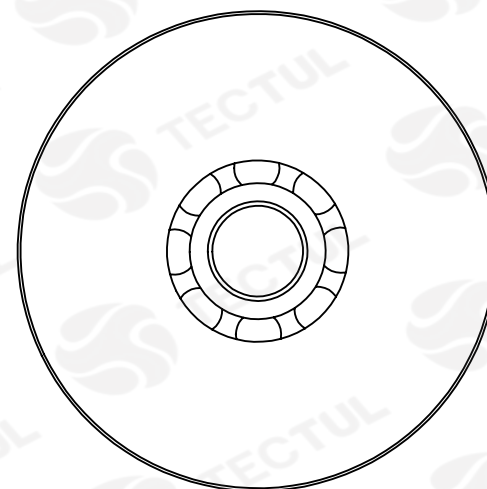

* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.




TECTUL

PULLEY WITHOUT BASE 2-1/2" PROFILE GUAYA 3/8" WITH BEARING

MATERIALS

PHYSICAL CHARACTERISTICS

DIMENSIONAL CHARACTERISTICS

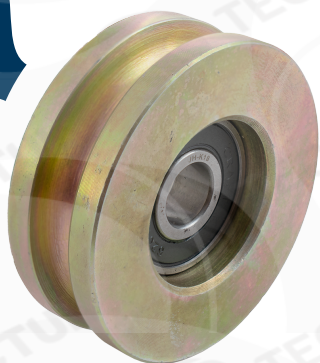

CHARACTERISTICS

Designed to increase the strength of lifting with a wheel track and a cable, rope or chain.

MATERIALS

Cold rolled carbon steel according to standards AISI/SAE 1045, DIN C22 or UNS G 10200.



APPLICATIONS

Designed for the agricultural sector. Ideals for drying coee, cocoa, corn and for the transport and lifting of loads.

TECHNICAL DATA

COMPONENTS	STATIC LOAD
SAE/1045 Steel Disc	
M12 Lock Nut	
Screw M12 X 40 mm Galvanized	290 kg
Bushing 3/8" x 7.8 mm	
Deep Groove Ball Bearing 6201	

* Reference photos and measurements, subject to change without prior notice from the supplier or manufacturer.

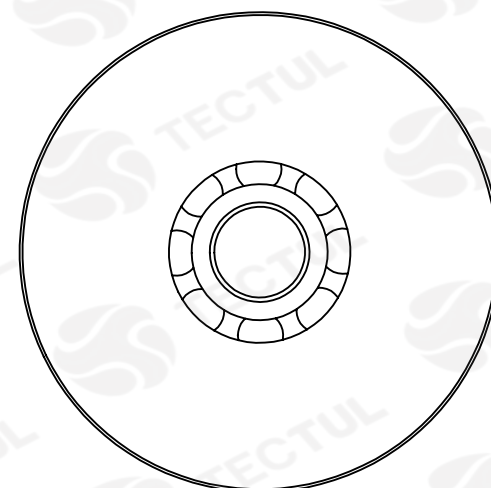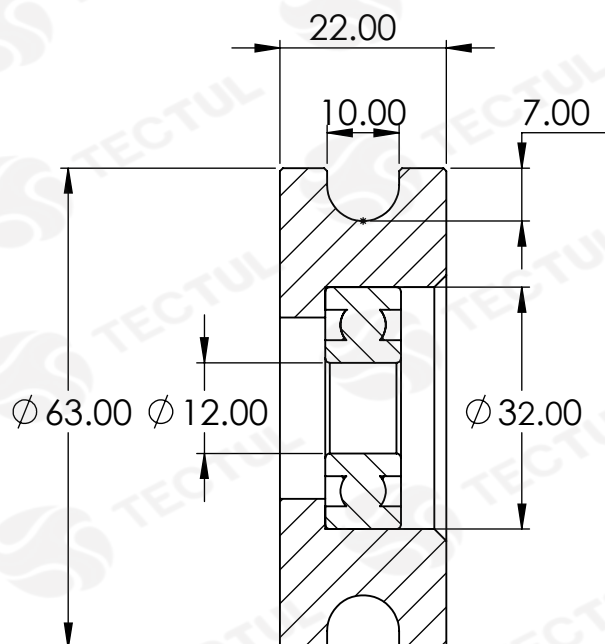

* Informational type cross section view. Does not represent a specific version of the accessory or item. Tolerances can vary $\pm 2\text{mm}$

* Reference photos and measurements, subject to change without prior notice from the supplier or manufacturer.