



TECTUL

NIPLE INOXIDABLE


DISEÑO



CARACTERÍSTICAS



MATERIALES

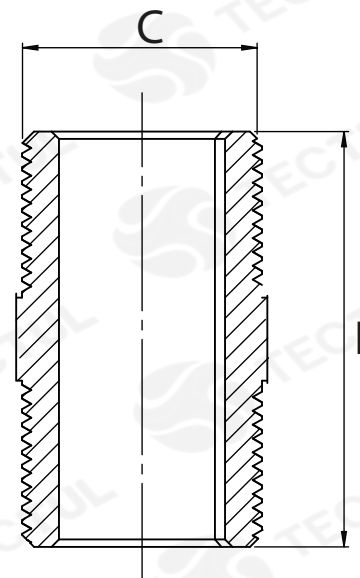

Vista de sección transversal de tipo informativa. No representa versión específica del accesorio.

CARACTERÍSTICAS



Calidad ASTM A-53, mediante los lineamientos ISO 9001:2008. Certificación de conformidad NTC 3470.

MATERIALES



Fabricado en Acero Inoxidable SCH 40

NORMAS DE DISEÑO



Para Conducción de fluidos poco corrosivos como gas, aceite, aire, agua, y vapor. Con conexión roscada según norma ANSI B1.20.1 tipo NPT.

DATOS TÉCNICOS

MEDIDA [in]	LONGITUD VARIABLE [in]	INTERVALOS DE MEDIDA (L)	DIÁMETRO EXTERNO [mm] (C)	PASO DE ROSCA (H/in)	PESO TUBERÍA [kg/m]
1/4"	1" a 20"	Aumenta de 1"	13.71*	14	0,49*
3/8"	1" a 20"	Aumenta de 1"	17.27*	14	0,63*
1/2"	1" a 20"	Aumenta de 1"	21.33*	14	1,00*
3/4"	2" a 20"	Aumenta de 1"	26.67*	11,5	1,28*
1"	2" a 20"	Aumenta de 1"	33.52*	11.5	2,09*
1-1/4"	2" a 20"	Aumenta de 1"	42.16*	11.5	2,69*
1-1/2"	2" a 20"	Aumenta de 1"	48.26*	11.5	3,11*
2"	2" a 20"	Aumenta de 1"	60.45*	11.5	3,93*
2-1/2"	2" a 20"	Aumenta de 1"	73.15*	11.5	5,27*
3"	3" a 20"	Aumenta de 1"	88.90*	11.5	6,46*
4"	3" a 20"	Aumenta de 1"	114.30*	8	8,37*
6"	3" a 20"	Aumenta de 1"	170.00*	8	13,85*

* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.



TECTUL

STAINLESS NIPLE


DESING



CHARACTERISTICS



MATERIALS

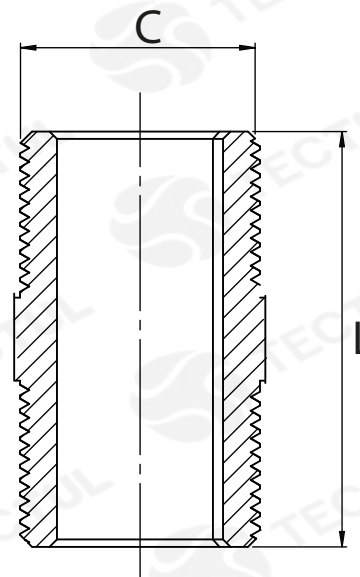

Informational type cross section view. It does not represent the specific version of the accessory.

CHARACTERISTICS



ASTM A-53 quality, using the ISO 9001: 2008 guidelines. NTC 3470 conformity certification.

MATERIALS



Manufactured in Stainless Steel SCH 40

DESIGN STANDARDS



Threaded connection according to standard ANSI B1.20.1 type NPT.

TECHNICAL DATA

MEASURE [in]	VARIANT LENGHT [in]	MEASUREMENT INTERVALS (L)	EXTERNAL DIAMETE [mm] (C)	THREAD PITCH (H/in)	WEIGHT [kg/m]
1/4"	1" a 20"	Increases de 1"	13.71*	14	0,49*
3/8"	1" a 20"	Increases de 1"	17.27*	14	0,63*
1/2"	1" a 20"	Increases de 1"	21.33*	14	1,00*
3/4"	2" a 20"	Increases de 1"	26.67*	11,5	1,28*
1"	2" a 20"	Increases de 1"	33.52*	11.5	2,09*
1-1/4"	2" a 20"	Increases de 1"	42.16*	11.5	2,69*
1-1/2"	2" a 20"	Increases de 1"	48.26*	11.5	3,11*
2"	2" a 20"	Increases de 1"	60.45*	11.5	3,93*
2-1/2"	2" a 20"	Increases de 1"	73.15*	11.5	5,27*
3"	3" a 20"	Increases de 1"	88.90*	11.5	6,46*
4"	3" a 20"	Increases de 1"	114.30*	8	8,37*
6"	3" a 20"	Increases de 1"	170.00*	8	13,85*

* Reference photos and measurements, subject to change without prior notice from the supplier or manufacturer.