



TECTUL

Manguera Aire Minería 600 psi



Datos técnicos						
Nominal [in]	DI mm	De mm	Refuerzos	W/P psi/BAR	B/P psi/BAR	Peso Aprox [Kg]
1/2	12,7	24,7	4	600/41,3	1800/124	0,290
3/4	19	31,1	4	600/41,3	1800/124	0,510
1	25,4	36	4	600/41,3	1800/124	0,847
1-1/4	31,8	44	4	600/41,3	1800/124	1,209
1-1/2	38,1	50	4	600/41,3	1800/124	1,372
2	50,8	65	4	600/41,3	1800/124	2,195
2-1/2	63,5	79	4	600/41,3	1800/124	2,873
3	76,2	92	6	600/41,3	1800/124	3,586
4	101,6	124	6	600/41,3	1800/124	6,720

MATERIALES
 Tubo interior con SBR negro.
 Refuerzo de poliéster de alta tensión.
 Cubierta NBR naranja.

APLICACIÓN
 Usado en la industria de la minería y la construcción para trabajos pesados.

CARÁCTERÍSTICAS DIMENSIONALES
 Medidas varían de 1/2" a 4".
 Presentación por rollos de 30 a 60 metros.

Características adicionales
 Excelente resistencia a la abrasión y condiciones climáticas.
 Presión de trabajo de 600 psi.

* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.




TECTUL

Mining Air Hose 600 psi

APPLICATION

MATERIALS

DIMENSIONAL CHARACTERISTICS

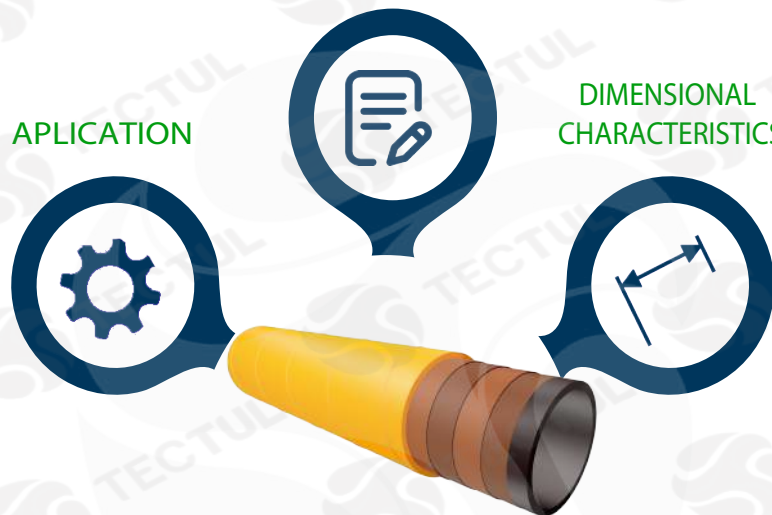

Technical Data						
Nominal [in]	DI mm	DE mm	Reinforcement	W/P psi/BAR	B/P psi/BAR	Aprox Weight [Kg]
1/2	12,7	24,7	4	600/41,3	1800/124	0,290
3/4	19	31,1	4	600/41,3	1800/124	0,510
1	25,4	36	4	600/41,3	1800/124	0,847
1-1/4	31,8	44	4	600/41,3	1800/124	1,209
1-1/2	38,1	50	4	600/41,3	1800/124	1,372
2	50,8	65	4	600/41,3	1800/124	2,195
2-1/2	63,5	79	4	600/41,3	1800/124	2,873
3	76,2	92	6	600/41,3	1800/124	3,586
4	101,6	124	6	600/41,3	1800/124	6,720



MATERIALS

Inner tube with black SBR.
High tension polyester reinforcement.
Orange NBR cover.



APPLICATION

Used in the mining and construction industry for heavy duty work.



DIMENSIONAL CHARACTERISTICS

Measurements vary from 1/2" to 4".
Presentation in rolls of 30 to 60 meters.

Additional characteristics

Excellent resistance to abrasion and weather conditions.
Working pressure of 600 psi.

* Reference photos and measurements, subject to change without prior notice from the supplier or manufacturer.